
# NASCO Introduces the DN4W Series

# The Forklift Designed With The Operator In Mind



The DN4W Model shown above handles vehicles easily from the end. Notice the Power Adjustable Forks which hydraulically adjust from 60" wide to 14" wide with optional cab.

## POWER ADJUSTABLE FORKS "P.A.F's"

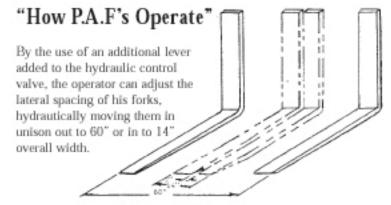

### Standard Equipment

- . 11 Ft. Lift Height, 2-Stage Mast
- · 4 Ft. Forks
- · PE4O45D John Deere Diesel Engine (80 HP)
- 4-Speed Power Shuttle Transmission (Automatic)
- Tires (See Chart)
- · Overhead Guard
- · 60° Carriage



The picture above shows the operator's seat being positioned where he is completely protected from low-flying debris from almost every angle. He is also protected by an overhead guard made from 2" x 4" steel tubing.

All the operator's controls are handily located as follows:

- The hydraulic control handles are located to the right of the seat.
- (2) The electrically operated forward/reverse lever is mounted to the left side of the steering wheel.
- (3) The service brakes are applied with the left foot and the accelerator with the right.
- (4) The parking brake is on the floor board on the left side.
- (5) The four-speed gear shift handle is located to the operator's left.
- (6) The engage/disengage button for models with fourwheel drive is located on the right side.

The operator has easy access to:

- (1) Keyed ignition switch
- (2) Starter button

He also has excellent visibility of:

- (1) Water temperature gauge
- (2) Oil Pressure gauge
- (3) Fuel gauge
- (4) Alternator light
- (5) Transmission temperature light
- (6) Hour meter

All above lights and gauges are located on the instrument panel on right side.

#### Optional Equipment

- . Forks: 5 thru 15 Feet
- · Mast: 2 or 3-Stage (Open View)
- · Side Shift
- . Power Adjustable Forks (Adds 2.4 to D&E)
- Lights
- · Back-up Alarm
- . Cabs: Adds 9.3" to Height
- Heater
- . 110 v. Block Heater
- . Fork Extensions: Up to 15 Ft.
- · Wider Carriage